


PX0700/P/04 Datasheet

Product Name // Pre-Wired Overmould Flex Cable
Connector PX0700 Series 4 Contact Plug Black Insert

 [View Product Page](#)

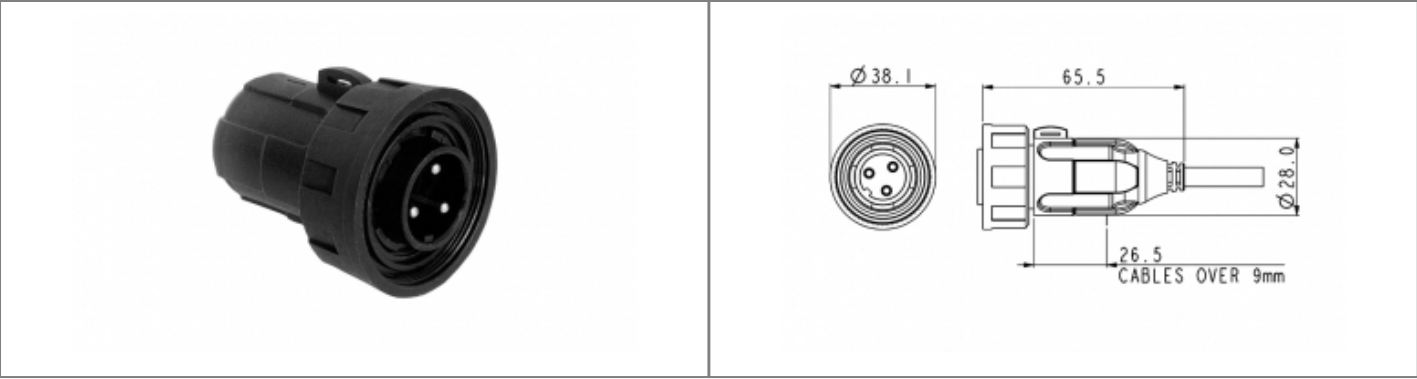

| // Product Description: | |
|--|---|
| <ul style="list-style-type: none">Pre-Wired Overmoulded Flex Connector cable assembliesWater and dustproof to IP68 when mated with compatible connectorPlug or Socket2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions | <ul style="list-style-type: none">Cable acceptance up to 14mm diameter with PVC or PU jacketsPX0734 Sealing Cap available separately to maintain IP rating of unmated connectorsMate with PX07 Series Inline and Panel Mount Connectors |

| // General Information: | |
|---------------------------------|---|
| Product Display Title: | Pre-Wired Overmoulded Flex Connector cable assemblies |
| Product Family: | Circular Power Connectors |
| Product Series: | Standard Buccaneer |
| Approvals: | CSA, UL, VDE |
| Body Material: | Polyamide (PA)- Glass Filled |
| Contact Type: | Plug Contact |
| Coupling Type: | Screw |
| Current Max: | 10A, 6A |
| Diameter Over Coupling Ring Mm: | 38.1mm |
| Flamability Rating: | UL94HB |
| Function: | Flex Connector Single Ended Cable |
| Insert Colour: | Black Insert |
| Ip Rating: | IP68, IP69K |
| Max Operating Temperature: | +70°C |
| Min Operating Temperature: | -20°C |
| Number Of Contacts: | 4 Contacts |
| Voltage Max: | 277V |

// Product PDF Links

 Standard Series power connectors...