
## PX0700/S/07 Datasheet



## Product Name // Pre-Wired Overmould Flex Cable Connector PX0700 Series 7 Contact Socket Black Insert





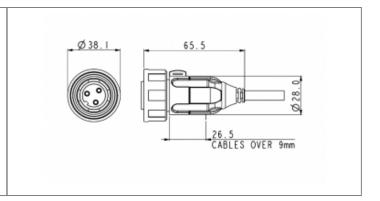

## // Product Description:

- O Pre-Wired Overmoulded Flex Connector cable assemblies
- Water and dustproof to IP68 when mated with compatible connector
- O Plug or Socket
- 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
- O Cable acceptance up to 14mm diameter with PVC or PU jackets
- PX0734 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX07 Series Inline and Panel Mount Connectors

## // General Information:

**Product Display Title:** 

Product Family:

**Product Series:** 

Approvals:

Body Material:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Insert Colour: Ip Rating:

Max Operating Temperature:

Min Operating Temperature:

Number Of Contacts:

Voltage Max:

Pre-Wired Overmoulded Flex Connector cable assemblies

Circular Power Connectors

Standard Buccaneer

CSA, UL, VDE

Polyamide (PA)- Glass Filled

Socket Contact

Screw

3A, 5A 38.1mm

UL94HB

Flex Connector Single Ended Cable

Black Insert

IP68, IP69K

+70°C

7 Contacts

277V





Standard Series power connectors..