
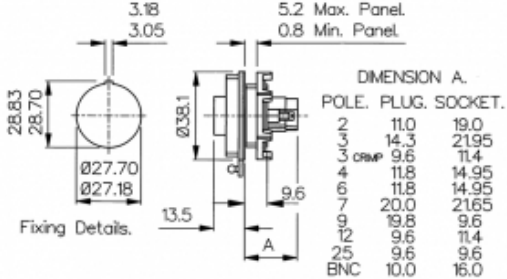


PX0727/P/GN2 Datasheet

Product Name // Front Panel Mount Connector PX0727
Series 9 Contact Plug Crimp Termination (Contacts Supplied Loose) Green Insert

 [View Product Page](#)





| DIMENSION A. | | |
|--------------|-------|---------|
| POLE. | PLUG. | SOCKET. |
| 2 | 11.0 | 19.0 |
| 3 | 14.3 | 21.95 |
| 4 | 9.6 | 11.4 |
| 6 | 11.8 | 14.95 |
| 7 | 11.8 | 14.95 |
| 9 | 20.0 | 21.65 |
| 12 | 19.8 | 9.6 |
| 25 | 9.6 | 11.4 |
| BNC | 10.0 | 9.6 |

// Product Description:

- Front Panel Mount Connectors
- Water and dustproof to IP68 when mated with compatible connector
- Single hole fixing
- Plug or Socket
- 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
- Screw, Crimp, Crimp/Solder Terminations available depending on part code and number of Contacts
- Screw contacts supplied fitted, Crimp contacts supplied loose (Crimp/Solder contacts and fitting tools available separately)

- Choice of coloured inserts to enable positive visual identification of connector:
- Part codes suffixed with a colour code followed by 2 have that colour insert
- Colour choices and colour codes: Blue (BL), Green (GN), Grey (GY), Light Grey (LG), Red (RD), White (WH), Yellow (YL), Black (standard colour, no suffix code)
- PX0799 rear of panel back shell and 12855 Insulation Boot available separately
- PX0733 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX07 Series Flex Connectors

// General Information:

Product Display Title:

Product Family:

Product Series:

Approvals:

Body Material:

Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Insert Colour:

Ip Rating:

Max Operating Temperature:

Min Operating Temperature:

Number Of Contacts:

Voltage Max:

Front Panel Mount Connectors

Circular Power Connectors

Standard Buccaneer

CSA, UL, VDE

Polyamide (PA)- Glass Filled

Plastic Body

Plug Contact

Screw

5A

38.1mm

UL94HB

Front Panel Mount Connector

Green Insert

IP68, IP69K


+70°C


-20°C

9 Contacts

150V

// Product PDF Links

 Standard Series power connectors...

 Standard Series power connectors...