
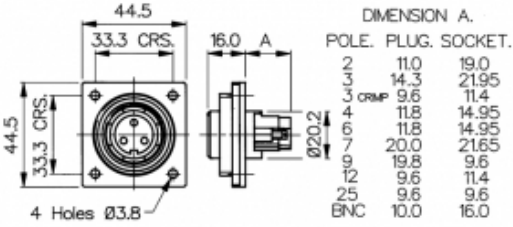


PX0767/P/YL2 Datasheet

Product Name // Low Profile Flange Mount Connector
PX0767 Series 6 Contact Plug Screw Termination (Contacts Supplied Fitted) Yellow Insert

 [View Product Page](#)





| DIMENSION A. | | |
|--------------|----------|---------|
| POLE. | PLUG. | SOCKET. |
| 2 | 11.0 | 19.0 |
| 3 | 14.3 | 21.95 |
| 4 | CRMP 9.6 | 11.4 |
| 6 | 11.8 | 14.95 |
| 7 | 11.8 | 14.95 |
| 9 | 20.0 | 21.65 |
| 12 | 19.8 | 9.6 |
| 25 | 9.6 | 11.4 |
| BNC | 10.0 | 9.6 |
| | | 16.0 |


// Product Description:

- Low Profile Flange Mount Connectors
 - Water and dustproof to IP68 when mated with compatible connector
 - Screw fixing flange, supplied with sealing gasket and screw sealing grommets
 - Plug or Socket
 - 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
 - Screw, Crimp, Crimp/Solder Terminations available, depending on part code and number of Contacts
- Screw contacts supplied fitted, Crimp contacts supplied loose (Crimp/Solder contacts and fitting tools available separately)
 - Choice of coloured inserts to enable positive visual identification of connector:
 - Part codes suffixed with a colour code followed by 2 have that colour insert
 - Colour choices and colour codes: Blue (BL), Green (GN), Grey (GY), Light Grey (LG), Red (RD), White (WH), Yellow (YL), Black (standard colour, no suffix code)
 - PX0733 Sealing Cap available separately to maintain IP rating of unmated connectors
 - Mate with PX07 Series Flex Connectors

// General Information:

| | |
|---------------------------------|-------------------------------------|
| Product Display Title: | Low Profile Flange Mount Connectors |
| Product Family: | Circular Power Connectors |
| Product Series: | Standard Buccaneer |
| Approvals: | CSA, UL, VDE |
| Body Material: | Polyamide (PA)- Glass Filled |
| Body Material Type: | Plastic Body |
| Contact Type: | Plug Contact |
| Coupling Type: | Screw |
| Current Max: | 3A, 5A |
| Diameter Over Coupling Ring Mm: | 38.1mm |
| Flamability Rating: | UL94HB |
| Function: | Low Profile Flange Mount Connector |
| Insert Colour: | Yellow Insert |
| Ip Rating: | IP68, IP69K |
| Max Operating Temperature: | +70°C |
| Min Operating Temperature: | -20°C |
| Number Of Contacts: | 6 Contacts |
| Voltage Max: | 277V |

// Product PDF Links

-  Standard Series power connectors...
-  Standard Series power connectors...