
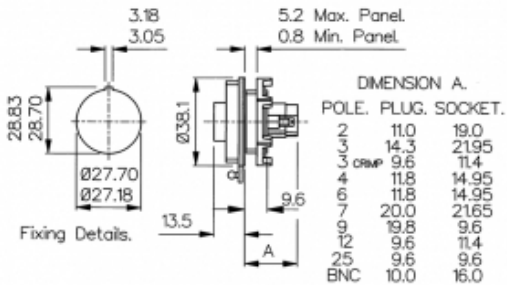


# PX0796/P/WH2 Datasheet

**Product Name** // **Front Panel Mount Connector PX0796**  
**Series** **12 Contact Plug Crimp/Solder Termination (Contacts Available Separately) White Insert**

 [View Product Page](#)





DIMENSION A.		
POLE.	PLUG.	SOCKET.
2	11.0	19.0
3	14.3	21.95
4	9.6	11.4
6	11.8	14.95
7	11.8	14.95
9	20.0	21.65
12	19.8	9.6
25	9.6	11.4
BNC	10.0	9.6

// **Product Description:**

- Front Panel Mount Connectors
- Water and dustproof to IP68 when mated with compatible connector
- Single hole fixing
- Plug or Socket
- 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
- Screw, Crimp, Crimp/Solder Terminations available depending on part code and number of Contacts
- Screw contacts supplied fitted, Crimp contacts supplied loose (Crimp/Solder contacts and fitting tools available separately)

- Choice of coloured inserts to enable positive visual identification of connector:
- Part codes suffixed with a colour code followed by 2 have that colour insert
- Colour choices and colour codes: Blue (BL), Green (GN), Grey (GY), Light Grey (LG), Red (RD), White (WH), Yellow (YL), Black (standard colour, no suffix code)
- PX0799 rear of panel back shell and 12855 Insulation Boot available separately
- PX0733 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX07 Series Flex Connectors

// **General Information:**

**Product Display Title:**

**Product Family:**

**Product Series:**

**Approvals:**

**Body Material:**

**Body Material Type:**

**Contact Type:**

**Coupling Type:**

**Current Max:**

**Diameter Over Coupling Ring Mm:**

**Flamability Rating:**

**Function:**

**Insert Colour:**

**Ip Rating:**

**Max Operating Temperature:**

**Min Operating Temperature:**

**Number Of Contacts:**

**Voltage Max:**

Front Panel Mount Connectors

Circular Power Connectors

Standard Buccaneer

CSA, UL, VDE

Polyamide (PA)- Glass Filled

Plastic Body

Plug Contact

Screw

5A

38.1mm

UL94HB

Front Panel Mount Connector

White Insert

IP68, IP69K


+70°C


-20°C

12 Contacts

50V

// **Product PDF Links**

 Standard Series power connectors...

 Standard Series power connectors...