


PX0931/04/S Datasheet

Product Name // Panel Mount Connector PX0931 Series 4
Contact Socket

 [View Product Page](#)

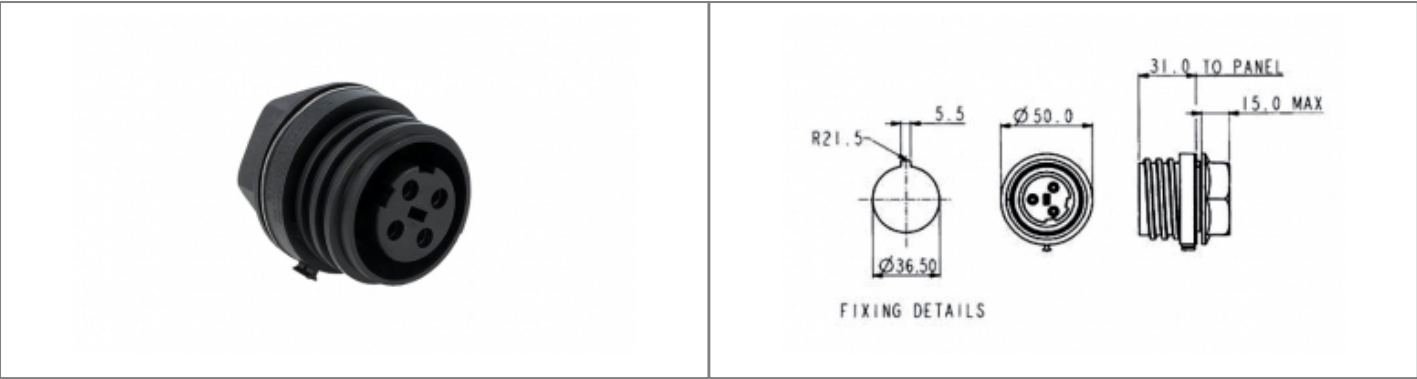

// Product Description:

- Panel Mount Connector
 - Water and dustproof to IP68 when mated with compatible connector
 - Positive fast-acting locking ring - can be turned with a gloved hand
 - Plug or Socket
 - 2, 3, 4, 5, 7, 10 Contact with leading Earth on 3, 4, 5, 7 Contact versions, trailing Neutral on 5 Contact version
- Single hole fitting, anti-rotation key
 - Panel thickness 3mm-7mm
 - Supplied with high grade sealing gasket
 - PX0970/PX0992 Sealing Cap available separately to maintain IP rating of unmated connectors
 - Mate with PX0911 and PXA911 Series Flex Connectors

// General Information:

| | |
|---------------------------------|-----------------------------|
| Product Display Title: | Panel Mount Connector |
| Product Family: | Circular Power Connectors |
| Product Series: | 900 Series Buccaneer |
| Approvals: | CSA |
| Body Material: | Polyamide (PA) |
| Body Material Type: | Plastic Body |
| Contact Type: | Socket Contact |
| Coupling Type: | Screw |
| Current Max: | 25A |
| Diameter Over Coupling Ring Mm: | 58mm |
| Flamability Rating: | UL94V-0 |
| Function: | Front Panel Mount Connector |
| Ip Rating: | IP68 |
| Max Contact Accomodation Awg: | 14AWG |
| Min Contact Accomodation Awg: | 10AWG |
| Max Contact Accomodation Mm2: | 4mm2 |
| Min Contact Accomodation Mm2: | 2.5mm2 |
| Max Operating Temperature: | +85°C |
| Min Operating Temperature: | -40°C |
| Number Of Contacts: | 4 Contacts |
| Voltage Max: | 600V |

// Product PDF Links

-  900 Series power connectors...
-  900 Series power connectors wiring...

// Product 3D CAD Model Links

-  PX0931/04/S3D CAD Model



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)