


# PXP6012/03S/ST Datasheet

**Product Name** // **Front Panel Mount Connector PXP6012**  
**Series 3 Contact Socket Screw Termination (contacts supplied fitted) Plastic Body**

 [View Product Page](#)



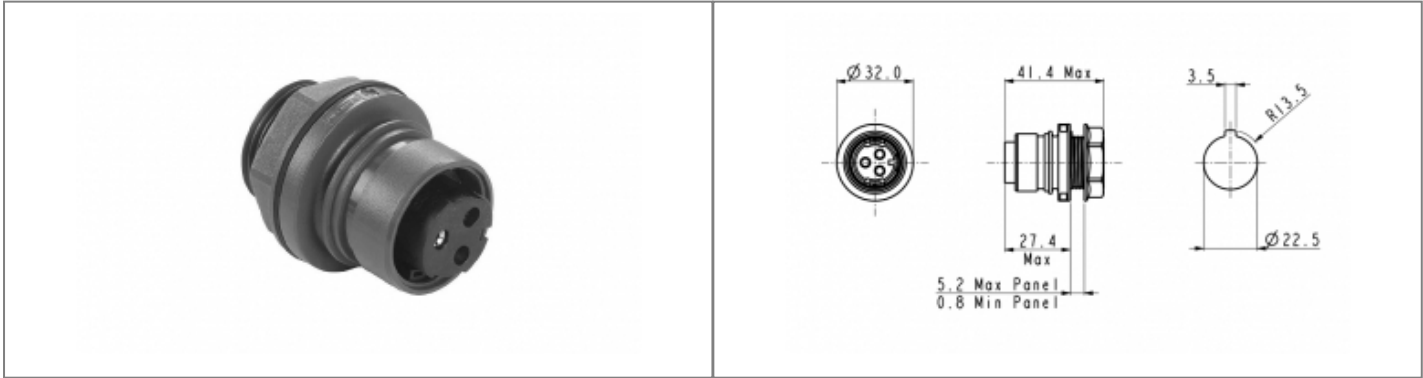

// **Product Description:**

- Front Panel Mount Connectors
- Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- Socket
- 3 Contacts
- Screw contacts supplied fitted
- Plastic Body
- PXP6083 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PXP6010 Series Flex Connectors

// **General Information:**

|                                 |   |
|---------------------------------|---|
| Product Display Title:          | Front Panel Mount Connectors                                    |
| Product Family:                 | Circular Power Connectors                                       |
| Product Series:                 | 6000 Series Buccaneer   |
| Approvals:                      | cUL, UL, VDE  |
| Body Colour:                    | Grey  |
| Body Material:                  | Polycarbonate/Polybutylene Terephthalate (PC/PBT)               |
| Body Material Type:             | Plastic Body  |
| Contact Type:                   | Socket Contact  |
| Coupling Type:                  | Push-Twist  |
| Current Max:                    | 16A, 11A  |
| Diameter Over Coupling Ring Mm: | 32mm  |
| Flamability Rating:             | UL94V-0   |
| Function:                       | Front Panel Mount Connector                                     |
| Insulation Resistance:          | >10 <sup>6</sup> MΩ @500V DC                                    |
| Ip Rating:                      | IP66, IP68, IP69K   |
| Max Contact Accomodation Awg:   | 14AWG   |
| Min Contact Accomodation Awg:   | 14AWG   |
| Max Contact Accomodation Mm2:   | 0.52mm2   |
| Min Contact Accomodation Mm2:   | 0.52mm2   |
| Max Operating Temperature:      | +120°C  |
| Min Operating Temperature:      | -40°C   |
| Max Panel Thickness:            | 5.2mm   |
| Min Panel Thickness:            | 0.8mm   |
| Number Of Contacts:             | 3 Contacts  |
| Panel Cut Out:                  | 22.50xR13.5-3.5mm   |
| Rohs Compliant:                 | Yes   |
| Salt Spray Corrosion Test:      | EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1 |
| Thread Size:                    | M22x1.5-6g  |
| Voltage Max:                    | 277V  |

// **Product PDF Links**

-  [6000 Series power connectors...](#)
-  [6000 Series metal body power...](#)

// **Product 3D CAD Model Links**

-  [PXP6012/03S/ST3D CAD Model](#)



Have a question or project enquiry  
you'd like to talk to us about?



[Click Here To Contact Us](#)