


PXP7011/10S/CR/1315 Datasheet

Product Name // Inline Cable Connector PXP7011 Series
10 Contact Socket Crimp/Solder Termination (contacts
available separately) 13mm-15mm Cable (Light Grey Gland)
Plastic Body


 [View Product Page](#)

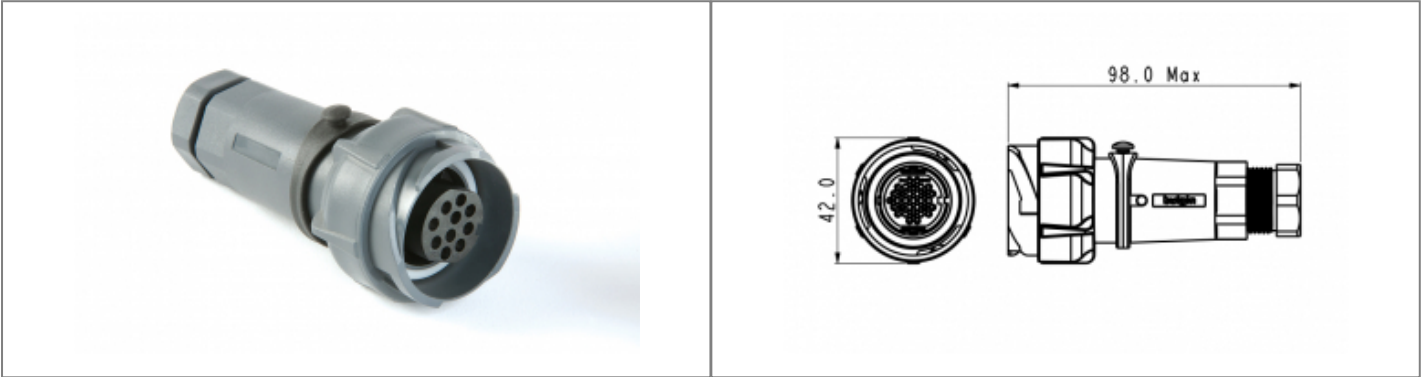


// Product Description:	
<ul style="list-style-type: none">Inline Cable ConnectorsWater and dustproof to IP66, IP68, IP69K when mated with compatible connectorQuick turn locking ring with less than quarter turn locking and positive feedbackPlug or Socket2, 3, 6, 10, 32 Contact with leading Earth contact on 3 Contact versionsScrew, Crimp/Solder terminations available, depending on part code; Screw contacts supplied fitted, Crimp/Solder contacts and fitting tools available separatelyChoice of body material depending on part code:	<ul style="list-style-type: none">Plastic body (part codes prefixed PXP)Metal body (part codes prefixed PXM). Cable Braid Termination option supplied with part codes suffixed /SN or available separately (part code PXM7090)Choice of cable acceptance 5mm-15mm diameter depending on part code (see data for details)PXP7088 Series Gland Packs available separately to accomodate all sizesPXP7082/PXM7082 Sealing Cap available separately to maintain IP rating of unmated connectorsMate with PXP7010/PXM7010 Series Flex Connectors


// General Information:	
<p>Product Display Title:</p> <p>Product Family:</p> <p>Product Series:</p> <p>Approvals:</p> <p>Body Material:</p> <p>Body Material Type:</p> <p>Contact Type:</p> <p>Coupling Type:</p> <p>Current Max:</p> <p>Diameter Over Coupling Ring Mm:</p> <p>Flamability Rating:</p> <p>Function:</p> <p>Ip Rating:</p> <p>Max Cable Entry Size:</p> <p>Min Cable Entry Size:</p> <p>Max Contact Accomodation Awg:</p> <p>Min Contact Accomodation Awg:</p> <p>Max Contact Accomodation Mm2:</p> <p>Min Contact Accomodation Mm2:</p> <p>Max Operating Temperature:</p> <p>Min Operating Temperature:</p> <p>Number Of Contacts:</p> <p>Voltage Max:</p>	<p>Inline Cable Connectors</p> <p>Circular Power Connectors</p> <p>7000 Series Buccaneer</p> <p>UL</p> <p>Polycarbonate/Polybutylene Terephthalate (PC/PBT)</p> <p>Plastic Body</p> <p>Socket Contact</p> <p>Bayonet Lock</p> <p>10A</p> <p>42mm</p> <p>UL94V-0</p> <p>Inline Cable Connector</p> <p>IP66</p> <p>15mm</p> <p>13mm</p> <p>20AWG</p> <p>18AWG</p> <p>0.75mm2</p> <p>0.5mm2</p> <p>+120°C</p> <p>-40°C</p> <p>10 Contacts</p> <p>600V</p>

// Product PDF Links

 7000 Series power connectors...

 7000 Series plastic body power...

// Product 3D CAD Model Links

 PXP7011/10S/CR/13153D CAD Model