
PX0797/P/YL2 Datasheet



Product Name // Low Profile Flange Mount Connector PX0797 Series 12 Contact Plug Crimp/Solder Termination (Contacts Available Separately) Yellow Insert

View Product Page



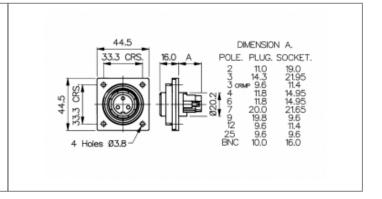

// Product Description:

- O Low Profile Flange Mount Connectors
- Water and dustproof to IP68 when mated with compatible connector
- Screw fixing flange, supplied with sealing gasket and screw sealing grommets
- O Plug or Socket
- 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3
 Contact Socket versions
- Screw, Crimp, Crimp/Solder Terminations available, depending on part code and number of Contacts
- Screw contacts supplied fitted, Crimp contacts supplied loose (Crimp/Solder contacts and fitting tools available separately)
- Choice of coloured inserts to enable positive visual identification of connector:
- Part codes suffixed with a colour code followed by 2 have that colour insert
- Colour choices and colour codes: Blue (BL), Green (GN), Grey (GY), Light Grey (LG), Red (RD), White (WH), Yellow (YL), Black (standard colour, no suffix code)
- PX0733 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX07 Series Flex Connectors

// General Information:

Product Display Title:

Product Family:

Product Series: Approvals:

Body Material:

Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Insert Colour:

Ip Rating:

Max Operating Temperature:

Min Operating Temperature: Number Of Contacts:

Voltage Max:

Low Profile Flange Mount Connectors

Circular Power Connectors

Standard Buccaneer

CSA, UL, VDE

Polyamide (PA)- Glass Filled

Plastic Body Plug Contact

Screw

5A

38.1mm

Low Profile Flange Mount Connector

Yellow Insert IP68. IP69K

+70°C

+70°C

12 Contacts

50V

