
PXP7012/32P/CR Datasheet



Product Name // Front Panel Mount Connector PXP7012 Series 32 Contact Plug Crimp/Solder Termination (contacts available separately) Plastic Body

View Product Page



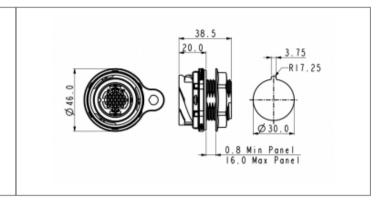

// Product Description:

- 0 Front Panel Mount Connectors
- 0 Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- O Quick turn locking ring with less than quarter turn locking and positive feedback
- 0 Plug or Socket
- 0 2, 3, 6, 10, 32 Contact with leading Earth contact on 3 Contact versions
- Screw, Crimp/Solder terminations available, depending on part code; Screw contacts supplied fitted, Crimp/Solder contacts and fitting tools available separately
- Choice of body material depending on part code:
- 0 Plastic body (part codes prefixed PXP). PXP7082 (plastic) and PXM7082 (metal) Sealing Caps available separately to maintain IP rating of unmated connectors
- 0 Metal body (part codes prefixed PXM). PXM7083 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PXP7010/PXM7010 Series Flex Connectors 0

// General Information:

Product Display Title: Product Family:

Product Series: Approvals:

Body Material: Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating: **Function:**

Ip Rating:

Max Contact Accomodation Awg: Min Contact Accomodation Awg:

Max Contact Accomodation Mm2: Min Contact Accomodation Mm2: Max Operating Temperature:

Min Operating Temperature:

Number Of Contacts:

Voltage Max:

Front Panel Mount Connectors

Circular Power Connectors 7000 Series Buccaneer

cUL, UL

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Plastic Body Plug Contact **Bayonet Lock** 2A, 3A

42mm

UL94V-0

Front Panel Mount Connector

IP66, IP68, IP69K

26AWG 22AWG 0.33mm2 0.13mm2 +120°C -40°C 32 Contacts

600V



